



# Master Track RV Polarstern ANT-XI/5

**Data Processing Report** 

# Contents

1	Introduction	1
2	Workflow	1
3	Cruise details	2
4	Sensor Layout	2
5	Processing Report	3

Contact: Dr. Rainer Knust Alfred Wegener Institute Columbusstrasse, D-27568 Bremerhaven, GERMANY Tel: +49(471)4831-1709 Fax: +49(471)4831-1918 Mail: Polarstern-Coordination@awi.de

Processing Agency: FIELAX Gesellschaft für wissenschaftliche Datenverarbeitung mbH Schleusenstr. 14, D-27568 Bremerhaven, GERMANY Tel: +49 (0) 471 30015 0 Fax: +49 (0) 471 30015 22 Mail: info@fielax.de Ref.: ANT-XI\_5\_nav.pdf Vers.

Vers.: 1 Date: 2016/02/12 Status: final



## **1** Introduction

This report describes the processing of raw data acquired by position sensors on board RV Polarstern during expedition ANT-XI/5 to receive a validated master track which is used as reference of further expedition data.

### 2 Workflow

The different steps of processing and validation are visualized in figure 1. Unvalidated data of up to three sensors are extracted from the DAVIS SHIP data base (https://dship.awi.de) in a 1-second interval or 5-second interval for cruises earlier than ARK-IX/2. They are converted to ESRI point shapefiles and imported to ArcGIS. A visual screening is performed to evaluate data quality and remove outliers manually. For all resulting position tracks, a quality check is performed using a ship's speed filter, an acceleration filter and a course-change filter. Filtered positions are flagged. In addition, a manual check is performed to flag obvious outliers. Those position tracks are combined to a single master track depending on a sensor priority list (by accuracy, reliability) and availability / applied exclusion of automatically or manually flagged of data. Missing data up to a time span of 60 seconds are linearly interpolated to achieve a master track with 1-second resolution. To reduce the amount of points for overview maps the master track is generalized by using the Ramer-Douglas-Peucker algorithm. This algorithm returns only the most significant points from the track. Full master track and generalized master track are written to text files and imported to PANGAEA (http://www.pangaea.de) for publication.

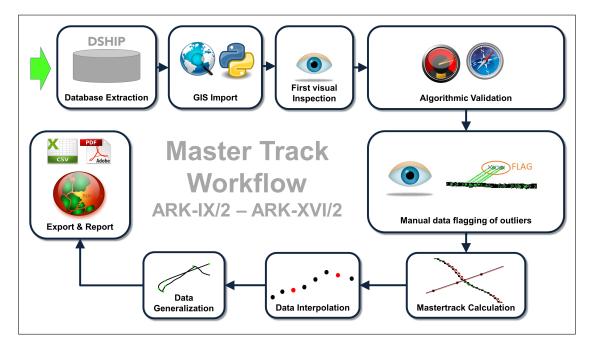


Figure 1: Workflow of master track data processing



### 3 Cruise details

Vessel name	RV Polarstern
Cruise name	ANT-XI/5
Cruise start	21.05.1994 Cape Town
Cruise end	18.06.1994 Bremerhaven
Cruise duration	29 days

# 4 Sensor Layout

This chapter describes the position sensors mounted during this cruise.

#### **Position sensors**

Sensor name	System Position Information, short: System	
Description	Position information delivered to the System	

Sensor name	Navigation Automation Control System, short: NACOS	
Description Navigation system of the ship		

Sensor name	Ashtech Z-12, short: Ashtech	
Description GPS-Receiver		

#### Position data from Parasound-surveys

Additionally to the up to three position sensors mounted, there are positions available extracted from the header-information of Parasound-surveys which are already processed and checked for quality and validity. If those data exist for this cruise, these data will be used instead of the derived master track. These data are identified as follows.

Sensor name	Corrected Parasound-Navigation, short: Parasound-NAV	
Description	Already processed Position information from Parasound navigation	



# **5 Processing Report**

#### **Database Extraction**

Data source	DSHIP database (dship.awi.de)
Exported values 2419201	
First dataset	1994-05-21T00:00:00 UTC
Last dataset	1994-06-18T00:00:00 UTC

#### Automatic Validation

The following thresholds were applied for the automatic flagging of the position data:

Speed Maximum 20 kn between two datapoints.	
Acceleration Maximum 1 m/s <sup>2</sup> between two datapoints.	
Change of course Maximum 5° between two datapoints.	

#### **Manual Validation**

Obvious outliers were removed manually. For details see Processing Logbook of RV Polarstern (hdl:10013/epic.45909).

#### Flagging result

	System		NACOS		Ashtech	
Missing	217327	8.983%	152535	6.305%	2218865	91.719%
Speed	3211	0.133%	31293	1.294%	3487	0.144%
Acceleration	289273	11.957%	374559	15.483%	22325	0.923%
Course	473560	19.575%	213054	8.807%	22915	0.947%
Manually	0	0.000%	0	0.000%	0	0.000%

#### Master Track Generation

The master track is derived from the position sensors' data selected by priority.

Sensor priority used:

- 1. System
- 2. NACOS
- 3. Ashtech

Filters applied: manual, speed.

Distribution of position sensor data in master track:



Sensor	Data points	Percentage
Total	2419201	100.000 %
Parasound-NAV	0	0.000%
System	2198663	90.884 %
NACOS	65209	2.695 %
Ashtech	9889	0.409%
Interpolated	143384	5.927%
Gaps	2056	0.085%

#### Remarks

Data only available until 1994-06-18T00:00:00 UTC.

#### Score

For each cruise, a score is calculated ranging from 0 (no data) to 100 (only very good data). the score for the cruise ANT-XI/5 is 84.

#### Generalization

The master track is generalized to receive a reduced set of the most significant positions of the track using the Ramer-Douglas-Peucker algorithm and allow a maximum tolerated distance between points and generalized line of 4 arcseconds.

Results:

Number of generalized points	1774 points
Data reduction	99.9267 %



#### **Result files**

Report in XML format:

The XML contains all information of the master track generation in a machine-readable format. In addition a XSD schema file is provided.

Master track text file:

The format is a plain text (tab-delimited values) file with one data row in 1 second interval.

Column separator	Tabulator "\t"			
Column 1	Date and time expressed according to ISO 8601			
Column 3	Latitude in	Latitude in decimal format, unit degree		
Column 4	Longitude in decimal format, unit degree			
Column 5	Flag for data source			
	0	Parasound-NAV		
	1	System		
	2	NACOS		
	3	Ashtech		
	INTERP	Interpolated point		
	GAP	Missing data		

Text file of the generalized master track:

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"
Column 1	Date and time expressed according to ISO 8601
Column 2	Latitude in decimal format, unit degree
Column 3	Longitude in decimal format, unit degree

Processing Report:

This PDF document.





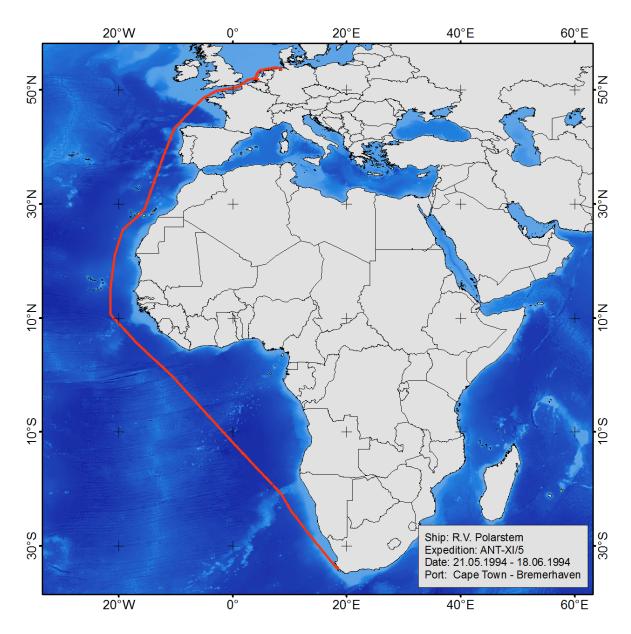


Figure 2: Map of the generalized master track