

CTD Data RV Heincke HE458

Data Processing Report

Contents

1	Introduction	1
2	Workflow	1
3	Cruise details	3
4	Sensor Layout	3
5	Processing	3
6	Results	5

Contact:

Gerd Rohardt

Alfred-Wegener-Institute

Am Handelshafen 12, D-27570 Bremerhaven, GERMANY

Mail: info@awi.de

Processing Agency:

FIELAX

Schleusenstr. 14, D-27568 Bremerhaven, GERMANY

Mail: info@fielax.de

Ref.: CTD-HE458-report.pdf

Vers.: 1

Date: 2016/07/27

Status: final

1 Introduction

This report describes the processing of CTD raw data acquired by Seabird SBE 911plus CTD on board RV Heincke during expedition HE458.

2 Workflow

The different steps of processing and validation are visualized in Figure 1. The CTD raw data are delivered from Gerd Rohardt (AWI). The station book of the RV Heincke cruise is extracted from the DAVIS SHIP data base (<https://dship.awi.de>). The first CTD station and cast is processed manually in SBE Data Processing to configure the *.psa Seabird routines *Data Conversion*, *Wild Edit*, *Bottle Summary*, *Split*, *Translate*, *Cell Thermal Mass*, *Loop Edit* and *Bin Average*. The Seabird routines are then run in a batch job *CTDjob* in ManageCTD to process the complete CTD data set. The downcast of each CTD station/cast is used for further processing. In *CTDjob* the start record and the lowest altimeter point of the downcast is selected. With the *Utilities* → *Dship Ebook* function of ManageCTD the DAVIS SHIP station book extraction is used for getting the header information of all CTD stations/casts of the cruise. ManageCTD *Utilities* → *Find Profile* function compares station times of the header with the entries in the station book to find out the correct naming of the stations and casts. In *CTDheader* in ManageCTD the header information of each CTD station/cast is displayed, controlled and corrected if necessary. *CTDdespike* in ManageCTD is used for a visual check of the data and to erase/interpolate spikes in the data if necessary. Additionally, a sensor pair (Temp1/Sal1 or Temp2/Sal2) is chosen for each station/cast of the RV Heincke cruise in *CTDdespike*.

ManageCTD *Utilities* → *CheckDoubleSensors* controls the quality of temperature and conductivity sensors. For this purpose outliers of too high sensor pair differences could be removed. The data is then converted to spreadsheet format with *dsp2odv* for visualization of the data in Ocean Data View (ODV). The second visual inspection of the CTD data allows a comparison with data from other CTD casts from close-by stations to verify the oxygen sensor data. Therefore, potential reference cruise data is downloaded from PANGAEA (<http://www.PANGAEA.de>). The reference data is converted to *.mat format. In the ManageCTD Final Processing the CTD data is displayed together with the reference data. Bad data points, sensors or casts are interpolated or erased from the data set and filters are applied if necessary. The processed CTD data are written to text files and imported to PANGAEA (<http://www.PANGAEA.de>) for publication.

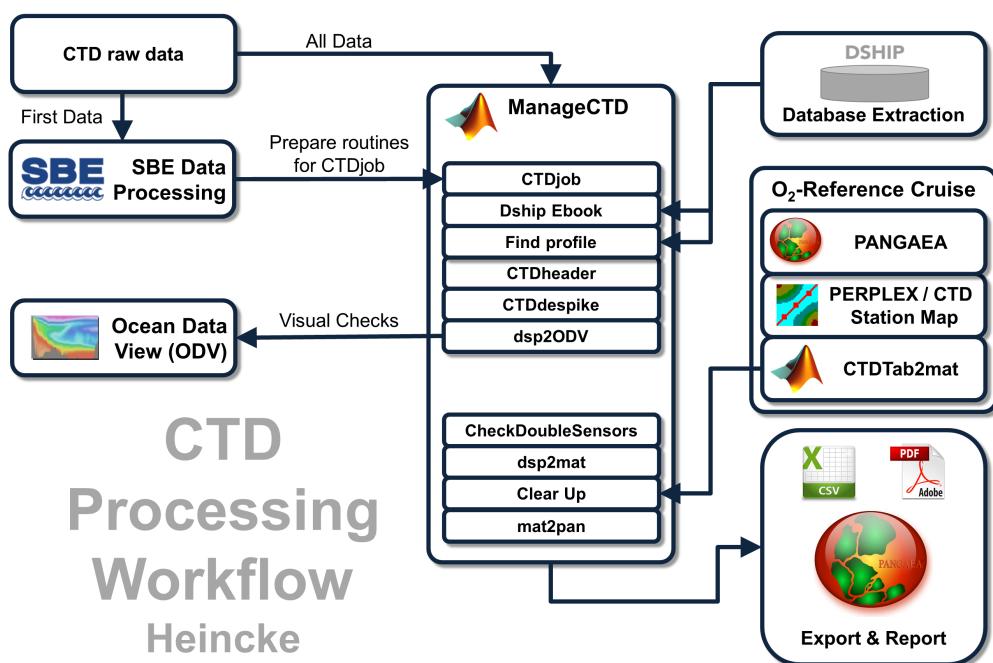


Figure 1: CTD data Processing Workflow

3 Cruise details

Vessel name	RV Heincke
Cruise name	HE458
Cruise start	14.03.2016 Bremerhaven
Cruise end	18.03.2016 Bremerhaven
Cruise duration	5 days
No. of CTD casts	21

4 Sensor Layout

This chapter describes the CTD sensors mounted during this cruise:

SBE 911plus CTD (SN: 1015), SBE Instrument Configuration Version 7.23.0.1.

ID	Sensor Name	Serial No.	Calibration Date
55	TemperatureSensor	5354	19-Jan-16
3	ConductivitySensor	3810	08-Dec-15
45	PressureSensor	1015	05-Oct-10
55	TemperatureSensor	5375	19-Jan-16
3	ConductivitySensor	2470	08-Dec-15
0	AltimeterSensor	46466	23-Mar-09
71	WET_LabsCStar	1348DR	28-Jan-2016
20	FluoroWetlabECO_AFL_FL_Sensor	1365	15-Jan-2016
38	OxygenSensor	1597	22-Dec-15

5 Processing

Details of processing procedures and processing parameters are described in *CTD Processing Logbook of RV Heincke* ([hdl:10013/epic.47427](https://hdl.handle.net/10013/epic.47427)).

Density Inversions and Manual Validation

Obvious outliers were removed manually. For the visual check density inversions $> 0.005 \text{ kg/m}^3$ and $> 0.01 \text{ kg/m}^3$ were flagged differently for display but removed automatically. Decisions whether the flagged values were manually removed or not are based on the description in *CTD Processing Logbook of RV Heincke* ([hdl:10013/epic.47427](https://hdl.handle.net/10013/epic.47427)).

Sensor Differences

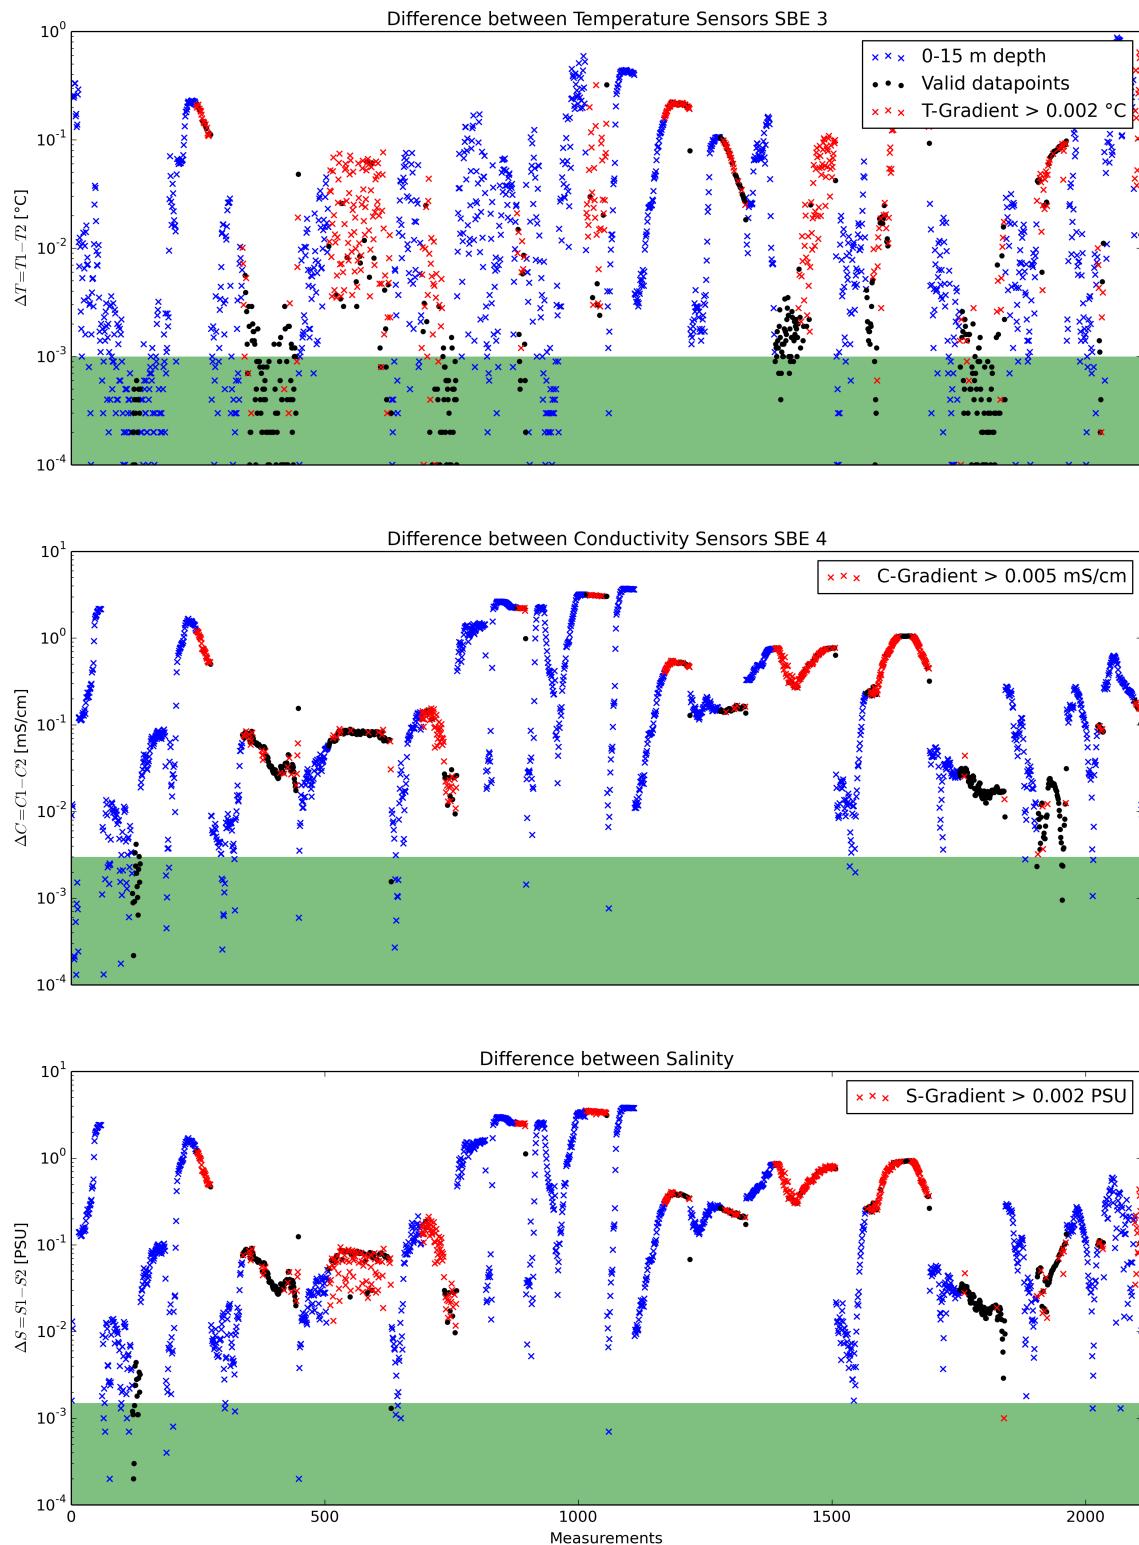


Figure 2: Data accuracy of sensor pairs HE458

6 Results

A complete processing overview for each sensor at each station is summarized in the table in the Appendix (Figure 3).

Double Sensor Check

In Figure 2, the absolute residuals between the two sensorpairs are shown for the measured parameters *Temperature* and *Conductivity* and the derived parameter *Salinity*. Measurements in shallow water depths < 15 m (blue crosses) and gradients between two datapoints exceeding a defined threshold (red crosses) were omitted for accuracy calculation.

Parameter	Accuracy given by manufacturer	Measurements removed	Remaining measurements within accuracy specifications
Temperature	$\pm 0.001^\circ C$	76.55%	40.81%
Conductivity	$\pm 0.003 mS/cm$	71.53%	3.16%
Salinity	$\pm 0.0015 PSU$	77.31%	1.67%

Comments

- 21 CTD/RO "on ground" entries in DShip station book
- 28 CTD raw data sets delivered
- 8 CTD casts were invalid or tests (9999.hex, p000a01.hex, p000a02.hex, p000a03.hex, p000a04.hex, p000a05.hex, p000a06.hex, p021a01.hex)
- 0 CTD cast was made twice on a station
- 0 CTD casts had a wrong filename
- 20 CTD casts processed and uploaded
- of these 20 processed CTD casts:
 - 1 oxygen profiles deleted (spiky and not matching to reference casts)
 - 73 data points interpolated
 - 813 data points erased

Result files

Text File (HE458_phys_oce.tab):

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"
Column 1	Event label
Column 2	Date/Time of event
Column 3	Latitude of event
Column 4	Longitude of event
Column 5	Elevation of event
Column 6	DEPTH, water
Column 7	Pressure, water
Column 8	Temperature, water
Column 9	Conductivity
Column 10	Salinity
Column 11	Temperature, water, potential
Column 12	Density, sigma-theta (0)
Column 13	Oxygen
Column 14	Oxygen, saturation
Column 15	Attenuation, optical beam transmission
Column 16	Fluorometer
Column 17	Number of observations

Processing Report (CTD-HE458-report.pdf):

This PDF document.

Station HE458/ Abbr.	Gear	Date	Time	Position Latitude	Position Longitude	Depth [m]	File	Sensor pair	Temp interp	Temp erased	Sal interp	Trans interp	Chloro interp	Oxy interp	complete	Oxygen reference	cruise/ssc-c	dist. (km)	Offset	Comments		
0001-1	CTD/RO	14.03.2016	10:12	53°44'.89" N	008°13'.22" E	8.5	p001a01.*	1	1		1	1	1	1	0	4	HE440/01-1	5.26	1.2			
0002-1	CTD/RO	14.03.2016	11:57	53°52'.96" N	008°05'.83" E	17.1	p002a01.*	2							0	0	HE440/01-1	5.29	0.1			
0003-1	CTD/RO	15.03.2016	7:03	54°42'.09" N	008°09'.57" E	9.8	p003a01.*	2	1	1	1	1	1	1	5	0	HE440/03-1	0.68	0.2			
0004-1	CTD/RO	15.03.2016	8:44	54°37'.09" N	007°41'.73" E	18.3	p004a01.*	2	1	1	1	1	1	1	13	1	HE440/04-1	0.65	0.1			
0005-1	CTD/RO	15.03.2016	10:39	54°29'.97" N	007°10'.19" E	33.8	p005a01.*	1	2	2	2	2	2	2	10	125	HE440/05-1	0.13	0.5	O2 very noisy > 12 m depth Sensorpair 2 noisy, O2 very noisy > 12 m depth		
0006-1	CTD/RO	15.03.2016	11:51	54°19'.94" N	007°07'.51" E	36	p006a01.*	1	1	1	1	1	1	1	135	6	135	HE440/06-1	0.65	0.3	Sensorpair 2 noisy, O2 very noisy > 5 m depth, oxygen deleted	
0007-1	CTD/RO	15.03.2016	13:35	54°19'.70" N	007°38'.89" E	26	p007a01.*	1	2	2	2	2	2	2	8	0	HE440/19-1	9.20				
0008-1	CTD/RO	15.03.2016	15:43	54°11'.65" N	008°11'.01" E	10.5	p008a01.*	1							0	0	HE440/08-1	1.05	0.1	Sensorpair 2 noisy		
0009-1	CTD/RO	15.03.2016	16:47	54°22'.11" N	008°09'.71" E	15.9	p009a01.*	1							0	0	HE440/09-1	0.25	0.2	Sensorpair 2 noisy		
0010-1	CTD/RO	15.03.2016	18:06	54°13'.73" N	008°20'.69" E	11.4	p010a01.*	1	1						1	0	HE440/10-1	0.26	0.4	Sensorpair 2 noisy		
0011-1	CTD/RO	16.03.2016	6:04	54°10'.57" N	008°06'.39" E	19.7	p011a01.*	1							1	36	4	36	HE440/11-1	0.28	0.1	Sensorpair 2 noisy, O2 very noisy > 16 m depth
0012-1	CTD/RO	16.03.2016	7:14	54°02'.26" N	008°13'.31" E	11.1	p012a01.*	1							0	0	HE440/12-1	0.77	0.1	O2 very noisy > 16 m depth		
0013-1	CTD/RO	16.03.2016	7:59	54°00'.39" N	008°04'.03" E	22.1	p013a01.*	1							29	0	29	HE440/13-1	4.96	0.2	O2 very noisy > 19 m depth	
0014-1	CTD/RO	16.03.2016	16:55	53°54'.92" N	007°46'.44" E	22.7	p014a01.*	1	1	1	1	1	1	1	56	5	56	HE440/22-1	1.44	0.5	O2 very noisy > 14 m depth	
0015-1	CTD/RO	17.03.2016	5:58	54°02'.26" N	007°37'.84" E	36.3	p015a01.*	1	1	3	1	1	1	1	96	7	96	HE440/21-1	0.74	0.8	Sensorpair 2 noisy, O2 very noisy > 19 m depth	
0016-1	CTD/RO	17.03.2016	7:18	54°14'.98" N	007°36'.89" E	37.8	p016a01.*	1							150	0	150	HE440/19-1	0.21	0.8	Sensorpair 2 noisy, O2 very noisy > 10 m depth	
0017-1	CTD/RO	17.03.2016	9:19	54°10'.12" N	007°04'.77" E	30	p017a01.*	1	1	3	1	3	1	1	102	9	102	HE440/18-1	0.92	0.1	O2 very noisy > 10 m depth	
0018-1	CTD/RO	17.03.2016	11:06	53°58'.94" N	007°03'.75" E	24.1	p018a01.*	1							67	0	67	HE440/17-1	0.33	0.5	O2 very noisy > 13 m depth	
0019-1	CTD/RO	17.03.2016	12:55	53°47'.04" N	006°59'.08" E	15	p019a01.*	1							11	0	11	HE440/16-1	0.55	0.6	O2 very noisy > 15 m depth	
0020-1	CTD/RO	17.03.2016	14:16	53°46'.99" N	007°15'.29" E	14.8	p020a01.*	1	1	1	1	1	1	1	5	1	5	HE440/15-1	4.82	0.4		
0021-1	CTD/RO	17.03.2016	15:53	53°52'.83" N	007°32'.14" E	19.6	p021a01.*	12	1	17	0	13	1	1	18	810	0	0			date/time not matching, no valid data in file	

Figure 3: CTD data Processing Summary HE458
Page 7 of 8

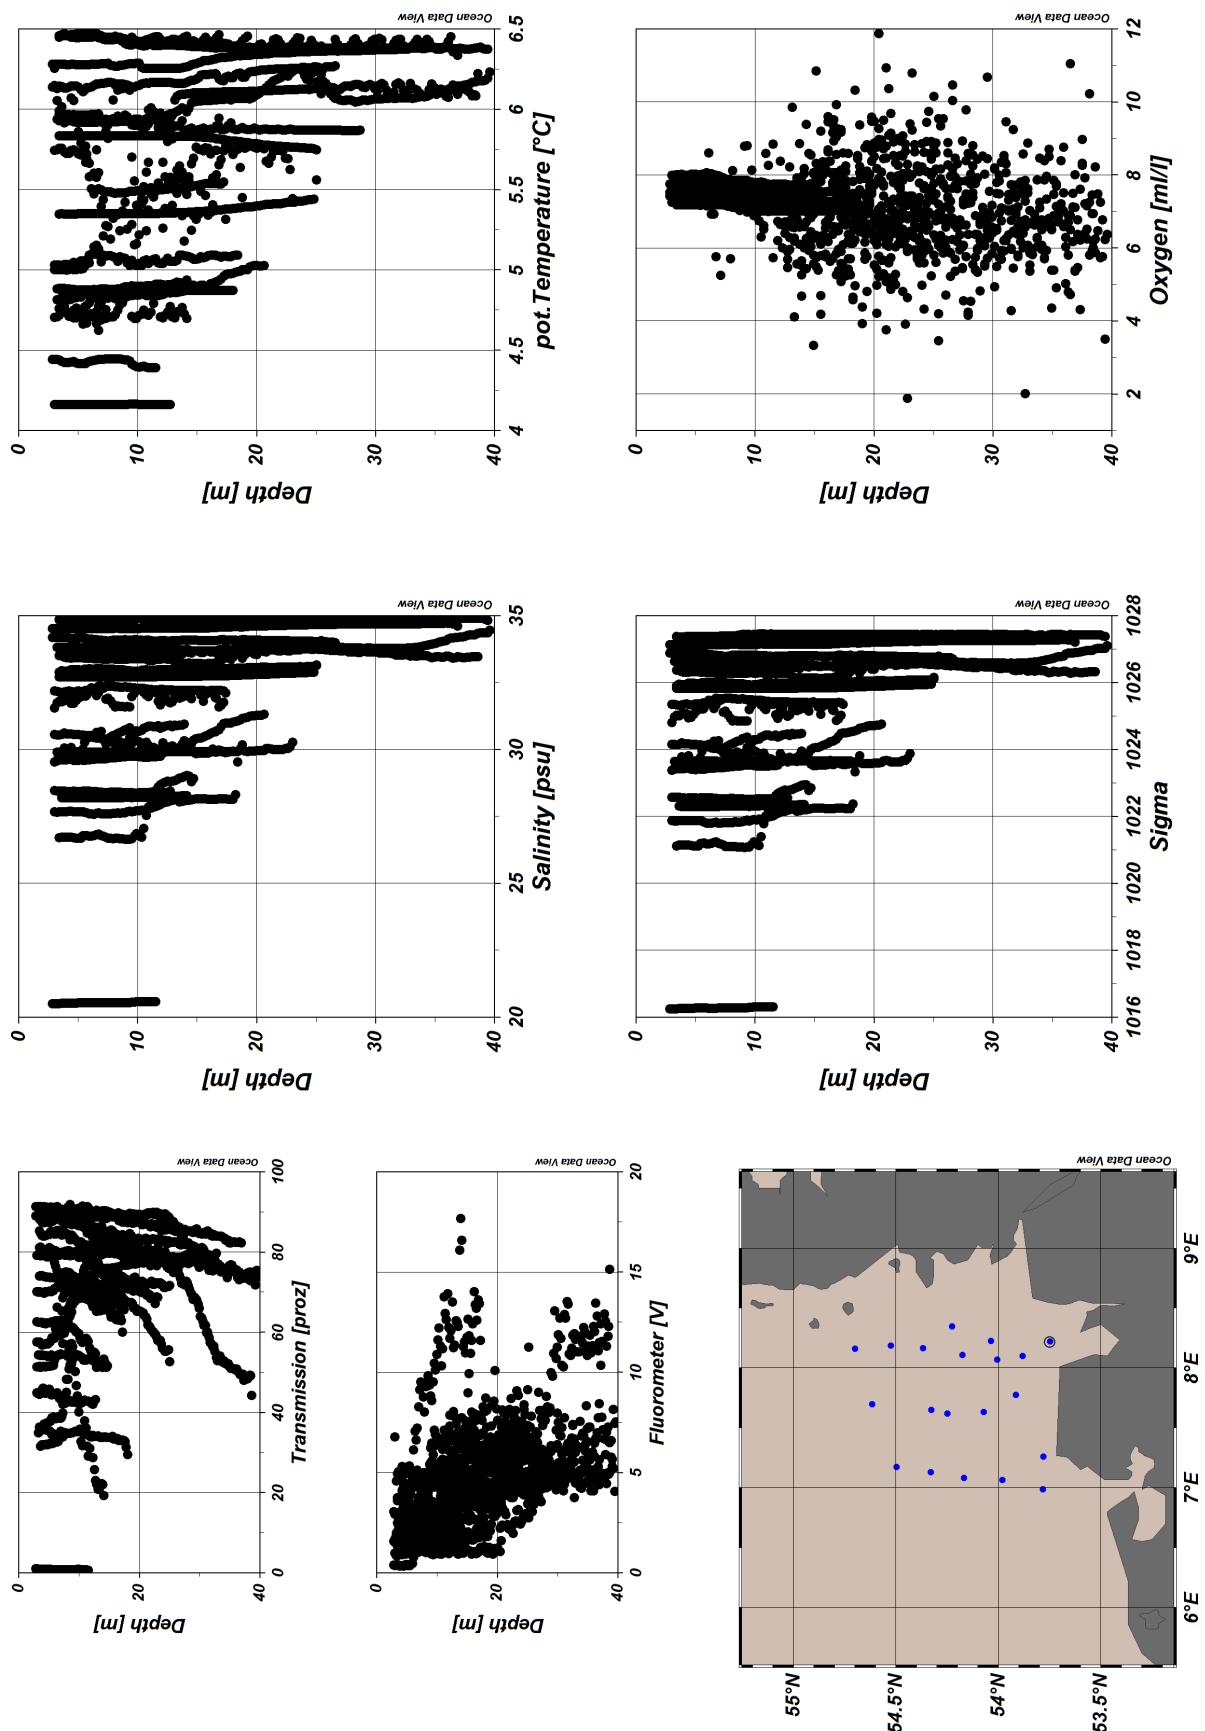


Figure 4: ODV Screenshot of HE458 CTD data
Page 8 of 8