



Continuous thermosalinograph oceanography along RV POLARSTERN cruise track PS126

Data Processing Report

Contents

1	Introduction	1
2	Sensor Details	1
3	Processing Report	2
4	Appendix	6

Contact:

Dr. Mario Hoppmann Alfred-Wegener-Institute Klußmannstr. 3d, D-27570 Bremerhaven, GERMANY

Mail: Mario.Hoppmann@awi.de

Processing Agency:

FIELAX

Gesellschaft für wissenschaftliche Datenverarbeitung mbH Schleusenstr. 14, D-27568 Bremerhaven, GERMANY

Tel: +49 (0) 471 30015 0 Fax: +49 (0) 471 30015 22 Mail: info@fielax.de

Ref.: PS126_TSG.pdf	Vers.: 1	Date: 2021/11/22	Status: final
---------------------	----------	------------------	---------------



1 Introduction

This report describes the processing of raw data acquired by the thermosalinographs on board RV Polarstern during expedition PS126 to receive cleaned up and corrected salinity data. Detailed description of the processing of the data and the workflow is given in the general report "General Processing Report of Surface T/S Data RV Polarstern Cruises PS126".

Cruise details

Vessel name: RV Polarstern

Cruise name: PS126

Cruise start: 2021-05-24
Cruise end: 2021-06-27
Cruise duration: 34 days
Working area: Arctic Ocean

2 Sensor Details

Following sensors were installed during cruise PS126. Only data from **TSG1** are uploaded to PAN-GAEA for cruise PS126 and are furthermore considered in this report (for reasoning see General Processing Report).

	TSG1	TSG2
Serial number	SBE21-3190	SBE21-3203
Installation	2021-05-24	2021-05-24
Deinstallation	2021-06-27	2021-06-27
Days installed	34	34
External temperature sensor	SBE38-0110	SBE38-0119



3 Processing Report

Database Extraction

Data source	DSHIP database (dship.awi.de)
Start of raw file	2021-05-24T09:00:00
End of raw file	2021-06-27T15:59:59
Number of lines in hexadecimal raw	2962800
file	
First dataset	2021-05-24T14:50:45
Last dataset	2021-06-27T06:24:06

Calculation of 10min means

The calculation of 10min means included the removal of outliers outside a 2-times standard deviation for each data interval. The number of outliers for each parameter are given here.

Number of outliers >2*std		
Internal temperature	23561	
Conductivity	22878	
External temperature	24559	
Salinity	29790	
Result after outlier removal		
Number 10-min-means	4607	

Manual flagging

After processing the data were visually inspected. The whole data from a specific timestamp were deleted if there was only one parameter to be manually flagged. 6 data points were manually removed from the TSG1 dataset of PS126.

Assigning navigation data

Data from the corrected mastertrack of cruise PS126 were assigned to the 10min means of TSG1. A speed filter of 0.5 knots minimum speed is applied to avoid redundant data. See Figure 1 and Figure 2 for the processed and corrected data of TSG1.

Number of speed flags: 1495

Number of data in final output file: 3106



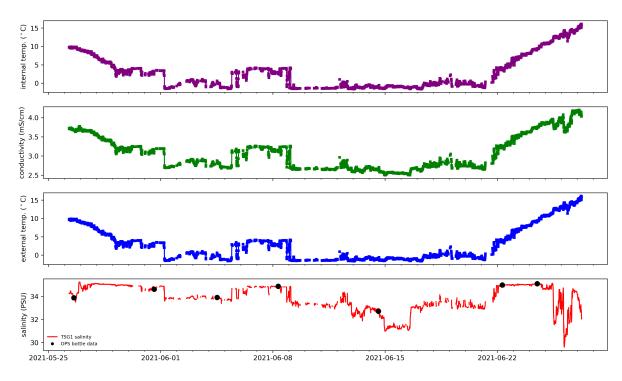


Figure 1: 10min means of data from TSG1

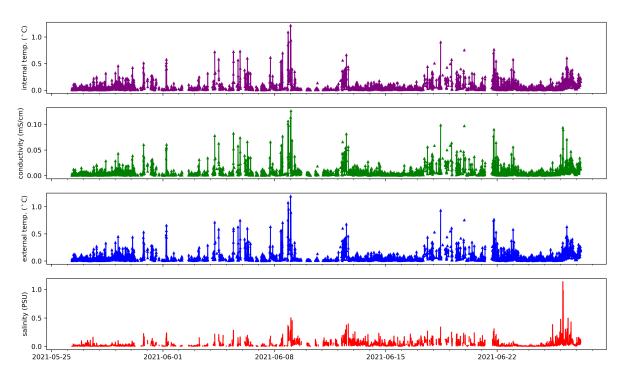


Figure 2: Standard deviations of 10min means of data from TSG1



Differences between internal and external temperature of TSG1 temperature sensors

Temperature differences between the internal and the external temperature sensors have to be small under normal circulation conditions. Means and standard deviations for the temperature differences as well as the number of data with a difference larger than 1 °C are given in the following table and are shown in Figure 3.

	TSG1 temperature difference	
	mean \pm standard dev.	no. > 1°C
Spot values	$0.0298 \pm 0.0491^{\circ}\text{C}$	72
10-min means	$0.0299 \pm 0.0134^{\circ}\text{C}$	0

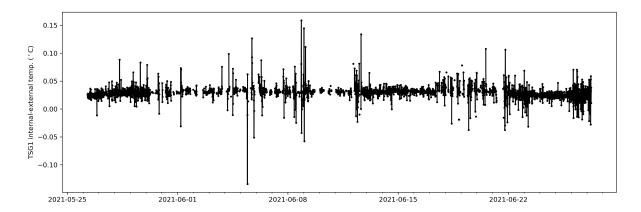


Figure 3: Differences between internal and external temperature sensors of TSG1

Result file

The result file is a plain text (tab-delimited values) file named **PS126_surf_oce.tab** with one data row in 10-min interval. Salinity values are calculated from the 10min means of conductivity and internal temperature data using a pressure of 11 dbar for the calculations. The pressure refers to the 11m water depth of the water inlet of the TSG system on R.V. Polarstern. Water temperature taken from the TSG external temperature sensor is given for reference.



Column separator	Tabulator "\t"
Column 1	Date and time expressed according to ISO 8601
Column 2	Latitude in decimal format, unit degree
Column 3	Longitude in decimal format, unit degree
Column 4	Water Temperature, unit degree celsius
Column 5	TSG Internal Temperature, unit degree celsius
Column 6	Conductivity, unit mS/cm
Column 7	Salinity, PSU

Comments


Data gaps due to system maintenance or system shutdown during harbour time:

• Salinity values show some scatter because of sea ice conditions in the target area west of Spitsbergen.

Apart from this, data gaps are caused by speed flagging or manual removal of outliers.



4 Appendix

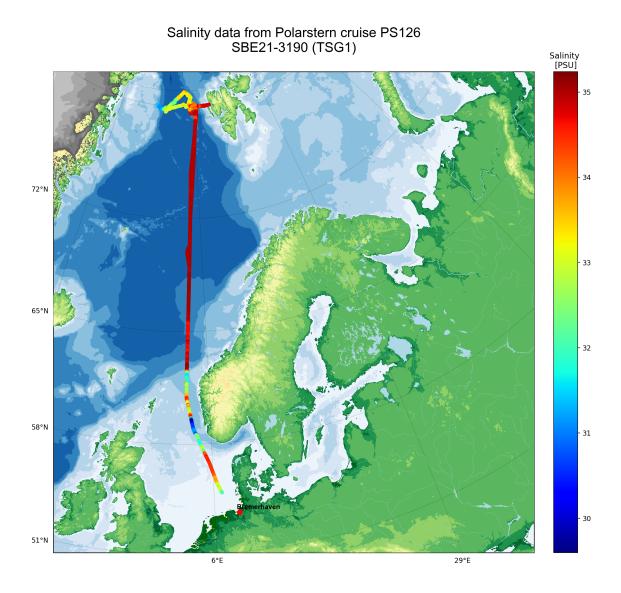

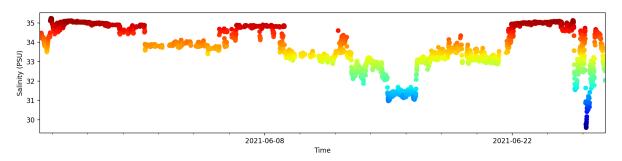
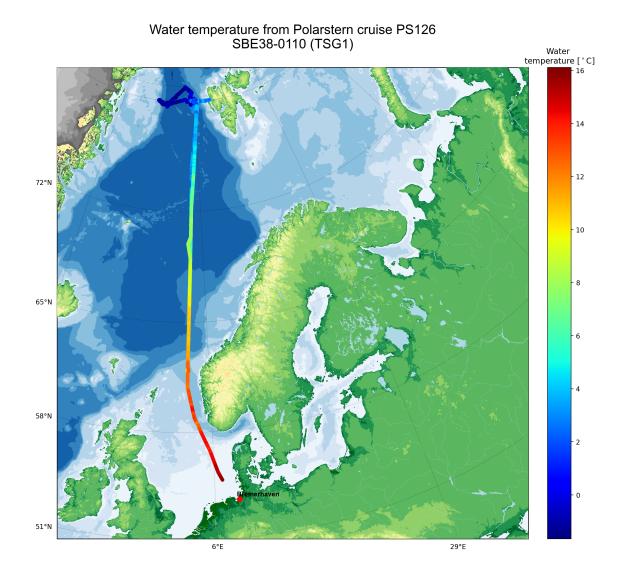


Figure 4: Salinity data from TSG1





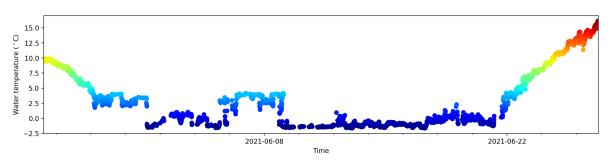


Figure 5: Temperature data from TSG1