

# Growth & yield analysis in tropical rain forest: applying a stand growth model in a GIS-framework

T. Ditzer<sup>†</sup>, M. Förster<sup>‡</sup>, P. Köhler<sup>†</sup>, R. Glauner<sup>‡</sup>, A. Huth<sup>†</sup>

Center for Environmental Systems Research

<sup>†</sup>Center for Environmental Systems Research, University of Kassel, D-34109 Kassel, Germany

<sup>‡</sup>Institute for World Forestry, Federal Research Centre for Forestry and Forest Products, Leuschnerstr. 91, D-21031 Hamburg, Germany



## Introduction

Tropical forest management is at a crossroad. Long-term field data to determine timber growth, to fix Annual Allowable Cuts (AACs), and to assess forest disturbance are widely not available. This problem can be bridged by growth models which provide a valuable tool supporting yield regulation.

Presently only few operational models exist for tropical rain forest. Such models simulate forest dynamics in stands of approx. 1 ha. We use the model FORMIX in a GIS-framework to support forest management decisions on the larger scale of field operation. This poster presents our concept of how to apply FORMIX for the 55,000 ha of Deramakot Forest Reserve in Sabah, Malaysia.

## Approach

FORMIX is a process-based model developed for ecological studies and management planning in the Dipterocarp forests of South-East Asia (Huth et al. 1997). Typical for Malaysia, the Forest Management Units (FMU) cover areas of commercial forest of approximately 100,000 ha. Within the FMU site conditions, actual growing stock, and forest structure vary considerably, especially in heavily logged and partially degraded forests as found at Deramakot.



Our approach considers the FMU as composed of single and mutually independent 0.1-2 ha-stands differing in site conditions and forest structure. We classify site characteristics and actual growing stock to derive a set of *site-specific stand types (SSSTs)* and analyse their particular present stand structure.

The model FORMIX is parametrized for the site conditions reflected in the SSSTs. In simulation, the range of site conditions given at Deramakot determines the *potential vegetation*. Based on the SSSTs, the regeneration of the disturbed *present vegetation* is simulated.

In the *exemplary simulation of potential timber harvests* we compare different logging strategies to evaluate timber yields and the effects on forest structure.

## Conclusion

Silvicultural decisionmaking needs support for planning the management of large, heterogeneous areas. Evaluation of forest resource condition and forest growth for developing sustainable management strategies must account for this heterogeneity. The joint application of a detailed stand growth model and spatial data analysis in a GIS provides a suitable approach to this task.

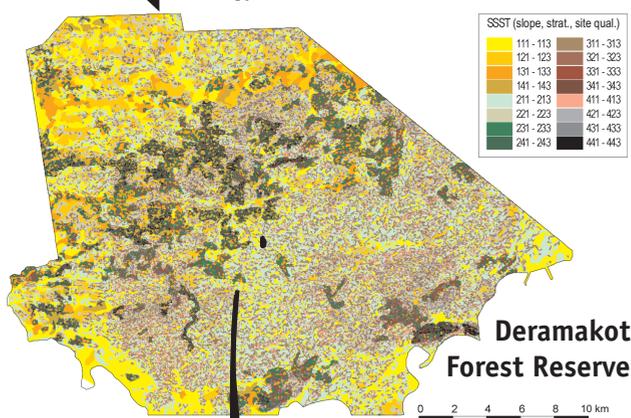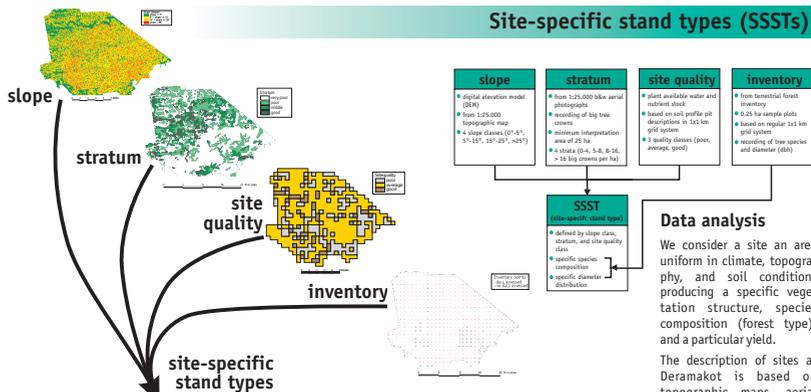

## The model FORMIX

The calculation of tree growth is mainly based on light-response characteristics of net photosynthesis and a simple model of tree physiology. Tree species are grouped into 4 functional species groups (emergents, main canopy species, pioneers, understorey species) and the model is subsequently parametrized based on field data.


site qualities (figures below on the left) can be derived from field data as well.

The effect of slope gradients on forest dynamics is more hypothetical. We assume higher probability of gap formation and less effective light attenuation on steeper slopes.

## Parametrization

Site quality affects the typical physiognomy and average increment of trees. We apply a growth factor (table below) derived from diameter increment measurements to reflect the effect on total increments. Height-diameter-curves and leaf area in its relation to diameter for differing

species group	site quality		
	poor	average	good
emergents	-10%	±0%	+10%
main canopy species	-13%	±0%	+13%
pioneers	-23%	±0%	+23%
understorey species	-15%	±0%	+15%



## Potential vegetation

### Simulated mature forest structure dependent on site

Long term simulations of forest development are used to analyse the potential, mature forest structure. Based on the site classification, the model predicts mature forest structure on sites of different slope and — most important — site quality.

The stand pictures on the right show simulated 1-ha mature forest stands on sites with differing qualities and slope of 5°-15°. The table below summarizes several structural variables.


	site quality		
	poor	average	good
total aboveg. biomass [t 0.0M ha <sup>-1</sup> ]	232	453	556
basal area (> 10 cm dbh) [m <sup>2</sup> ha <sup>-1</sup> ]	21.1	30.5	35.6
stem number (> 10 cm dbh) [ha <sup>-1</sup> ]	766	753	819
standing vol. (> 10 cm dbh) [m <sup>3</sup> ha <sup>-1</sup> ]	206	385	438
stem number (> 60 cm dbh) [ha <sup>-1</sup> ]	7	23	25
standing vol. (> 60 cm dbh) [m <sup>3</sup> ha <sup>-1</sup> ]	66	229	237

## Exemplary simulation of potential timber harvests

### Reduced impact logging (RIL)


We simulate a RIL-technique: only commercial species > 60 cm dbh are harvested, 5 of these harvestable trees are left in the forest to foster natural regeneration, and low logging damages are assumed. A site with average quality and slope of 5°-15° is simulated.

The figure on the right shows the stem number and standing volume (clear bole vol.) of trees of harvestable dimension in a stand logged every 40 years with a 20% stand damage.

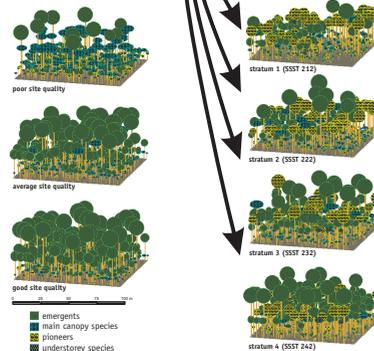

### Comparing logging strategies


Simulations as described on the left allow for comparing different logging strategies. The figure on the right depicts results for different scenarios of RIL, applying damages of 15% - 30% and logging cycles of 20-100 years.



### Simulated forest regeneration of SSSTs

An undisturbed development of the forest at Deramakot is simulated. Simulations are performed for each of the SSSTs. The tree diameter distribution derived for each SSST initializes the simulation (examples in the pictures on the left). The SSST's site quality and slope characterize the site conditions. The figures on the right show simulation results for the forest regeneration projected for the four strata on sites of average quality and slope 5°-15°.

## Present vegetation



Simulated standing volume of harvested trees and the assumedly 30% smaller net timber yield at roadside for different RIL-scenarios on a site of average site quality and slope 5°-15°

